

Fig. 1

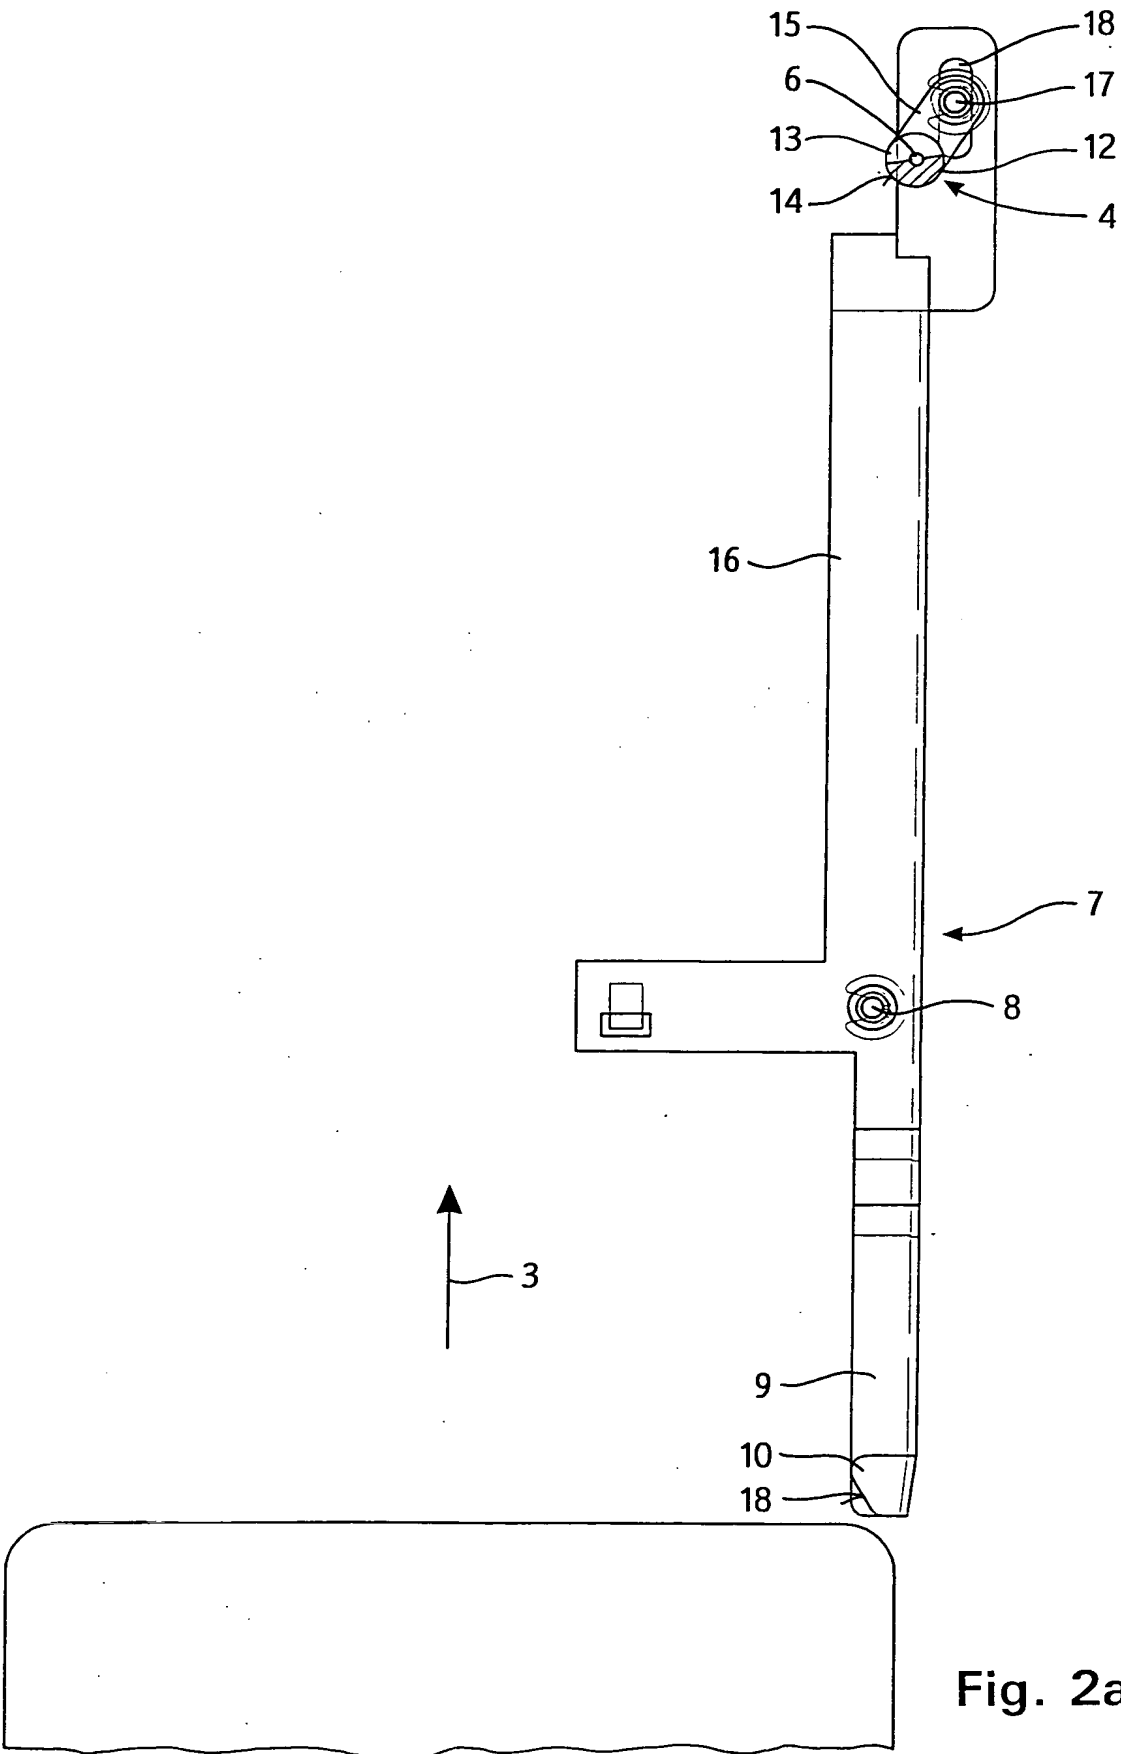


Fig. 2a

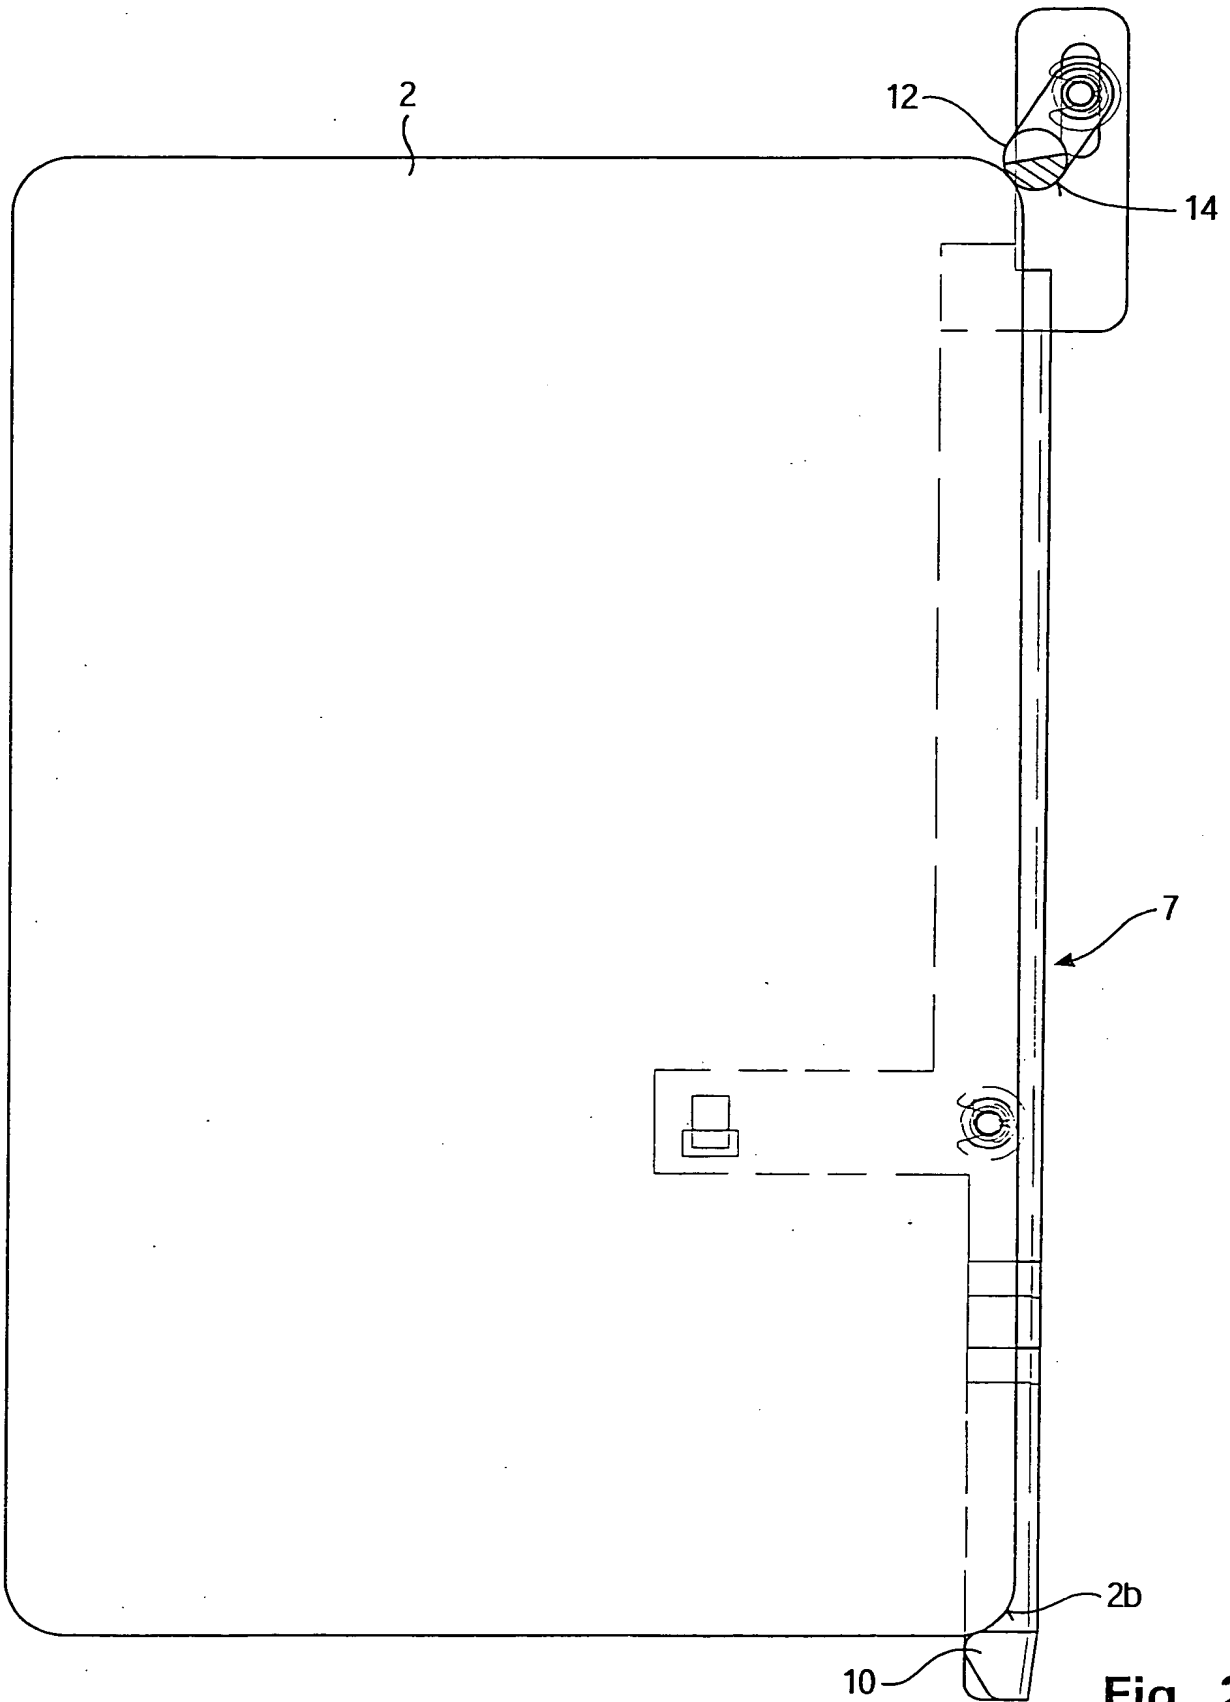


Fig. 2c

FIG. 3a is a perspective view of the device 100 in a closed position. The device 100 includes a main body 2 and a lid 30. The lid 30 is hinged to the main body 2 at a hinge 31. The lid 30 is shown in a closed position, covering the main body 2. The hinge 31 is located at the top of the main body 2 and the lid 30. The lid 30 has a rectangular shape with rounded corners. The main body 2 has a rectangular shape with rounded corners. The device 100 is shown in a perspective view, with the lid 30 slightly offset from the main body 2 to show the hinge 31.

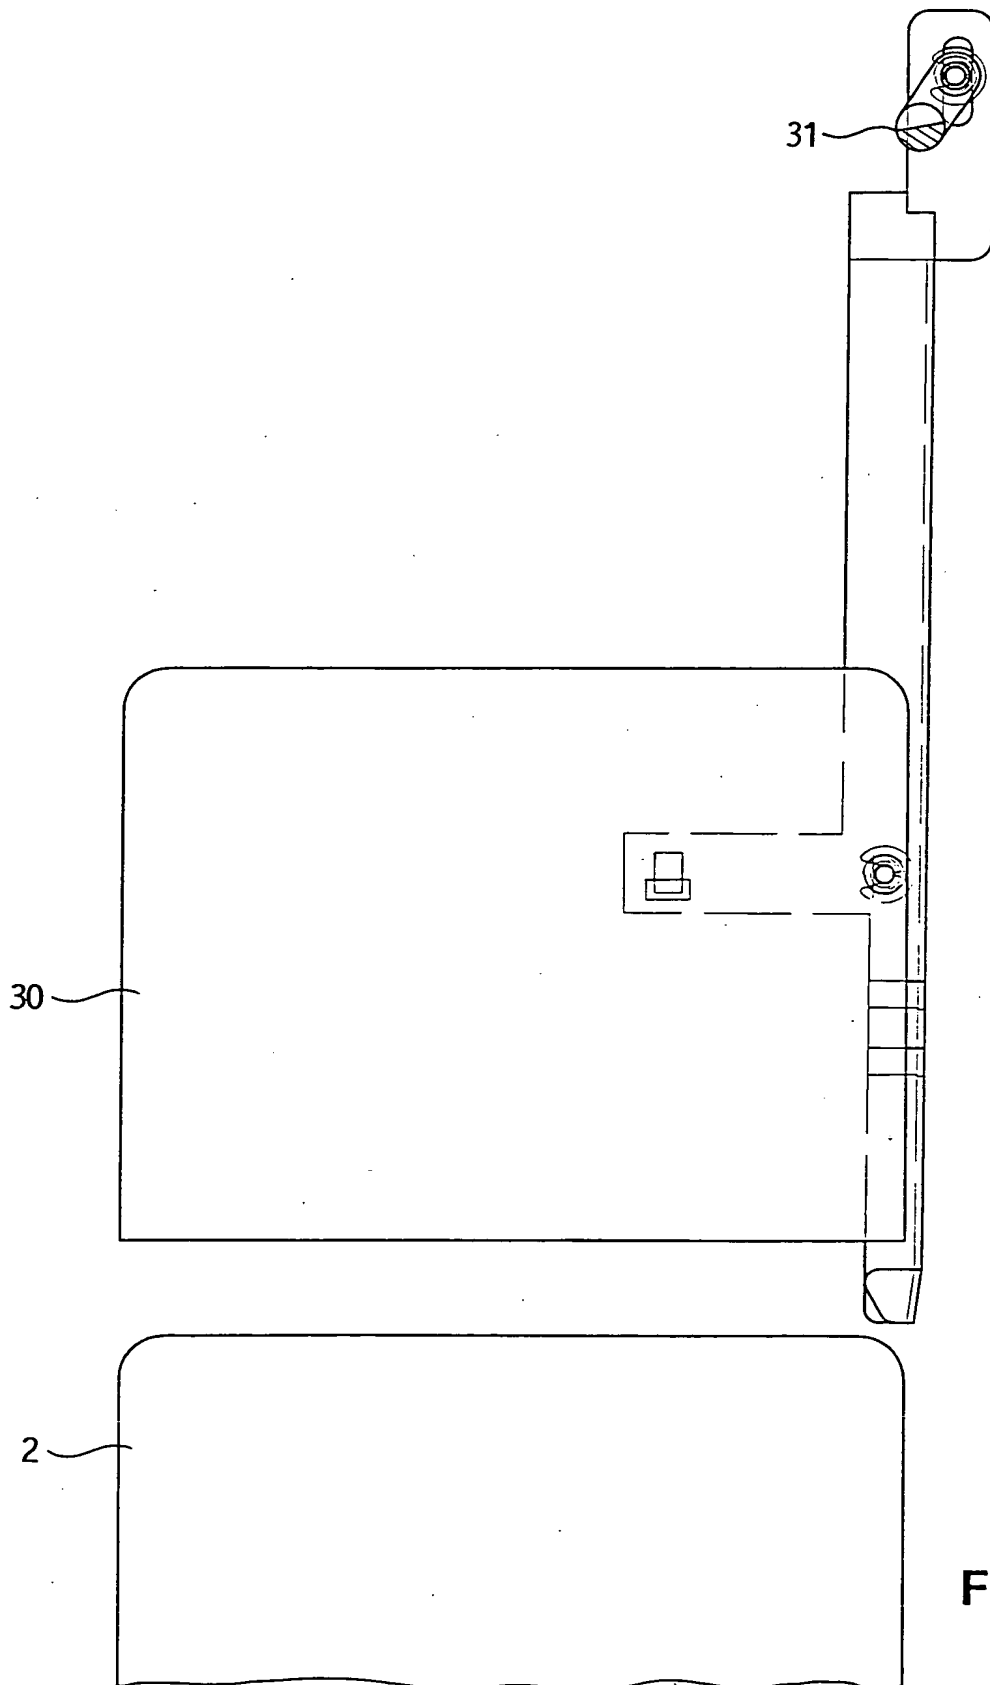


Fig. 3a

FIG. 3b is a perspective view of the device 100 in an open position. The device 100 includes a first panel 2 and a second panel 30. The first panel 2 is connected to the second panel 30 by a hinge assembly 14. The hinge assembly 14 includes a first hinge 12 and a second hinge 13. The first hinge 12 is located at the top of the first panel 2 and the second hinge 13 is located at the bottom of the first panel 2. The second panel 30 is shown in an open position, pivoted about the hinge assembly 14. An arrow 3 indicates the direction of movement of the second panel 30.

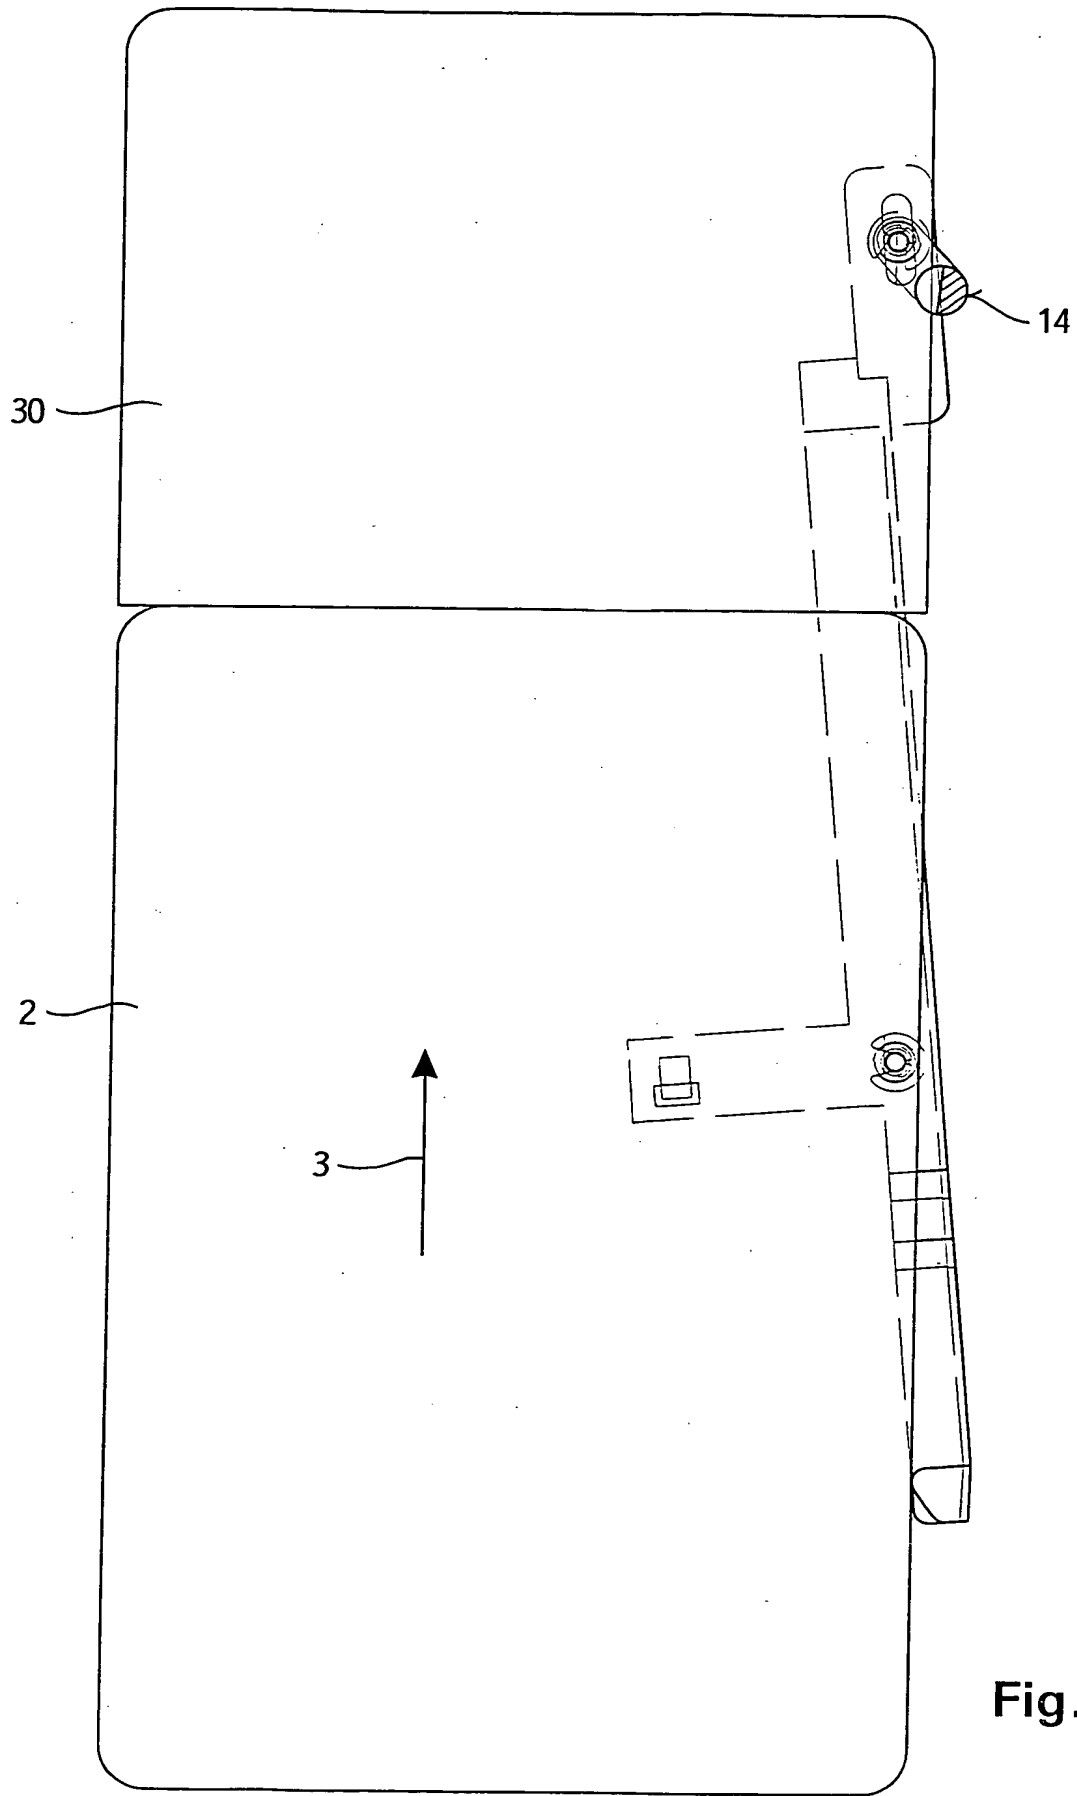


Fig. 3b

